


KENWOOD MC60 TO YAESU MIC PIN

CABLE CONNECTION ORIGINAL

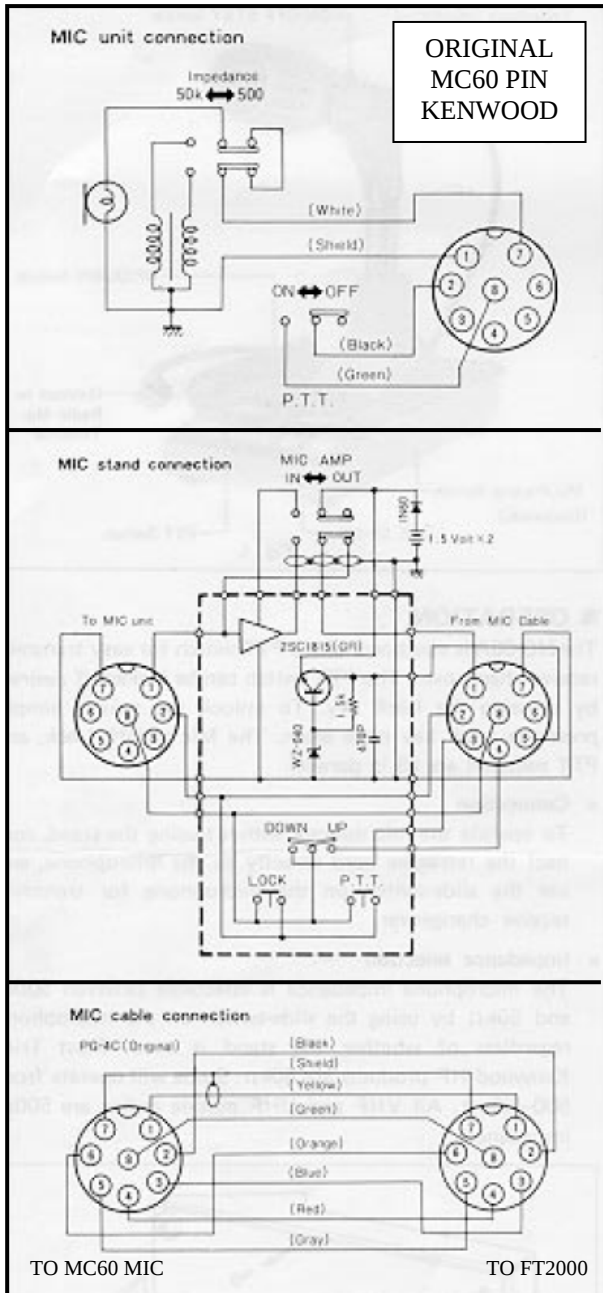

CABLE CONNECTION TO YAESU FT2000

FOR TO USING ON FT 2000
MIC TO UNIT CONNECTION SWITCH
IMPEDANCE to 50KOhm

MIC STAND CONFIGURATION

SWITCH [MIC AMP] TO [IN]
USE YAESU PIN 2 TO EXT. POWER
(The amplifier draw approximately 1ma.)

AND CREATE A NEW CABLE CONNECTION

TO MC60 KENWOOD PIN SIDE	TO YAESU PIN SIDE	YAESU PIN IN USE FOR	NOTE
1	8	MIC	
2	6	PTT	
3	3	DW	
4	1	UP	
5	2	EXT.PWR +	
6	NONE	4 NOT USED	FAST
7	7	GND MIC	
8	5	GND	

YAESU MIC FT-2000



(as viewed from front panel)

FT2000 PROC = OFF

MC60 MICAMP = IN

MC 60 IMPEDANCE = 50K

083 = 3-27 (or 3000 for QSO... if you like HIFI...)

123=300 124=5 125=6

126=1500 127=4 128=3

129=2500 130=5 131=3

MICGAIN at 12/15clock

I have not succeeded in finding a valid solution audio to use the radio processor with any mic!!!!!!